

PD 510 401




Pneumatically actuated 5/2-way spool valve with air-spring, actuated by permanent signal.

Normally open from 1 to 2 and from 4 to 5. If pressure is applied at 14, the valve is open from 1 to 4 and 2 to 3.

Exhaust can be throttled.

Operating pressure and actuation pressure should be at the same level.

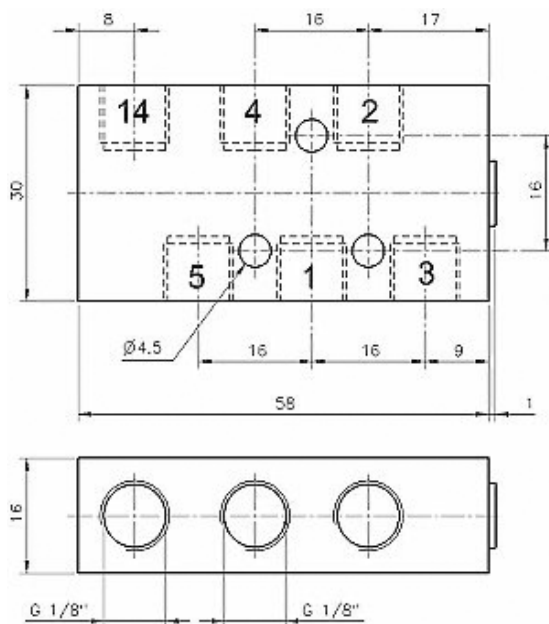

Type	Port size	Air flow	Operating press.	Actuation press.	Weight
PD 510 401	G 1/8"	450 l/min	2 - 10 bar	the same	0,07 kg