





MD 510 301/MD 510 341

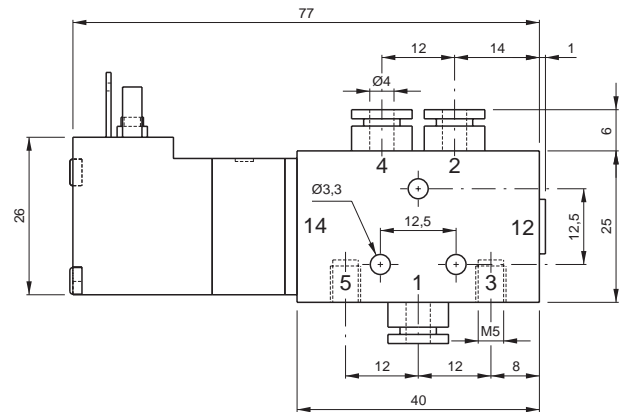

MD 510 301
MD 510 341

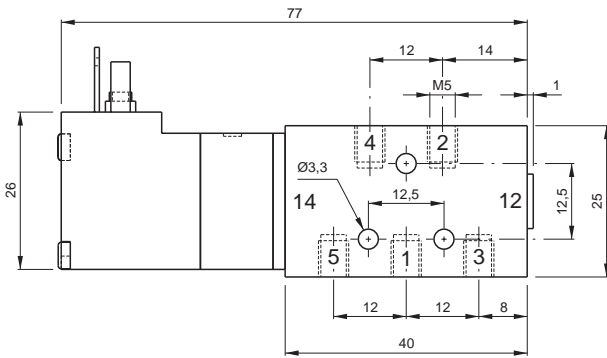

5/2-way solenoid valve with air spring, actuated by permanent signal.

Available with solenoid operators 24V = or 230 V ~.

Valves are generally equipped with manual override to push.

Type	Width [mm]	Port size 1, 2, 4	Air flow [l/min]	Operating pressure	Power consumption
MD 510 301	15	M5	280	3-10 bar	1.9 W / 3.6 VA
MD 510 341	15	4 mm p.i.f.	280	3-10 bar	1.9 W / 3.6 VA

2.5.2.1.1.