
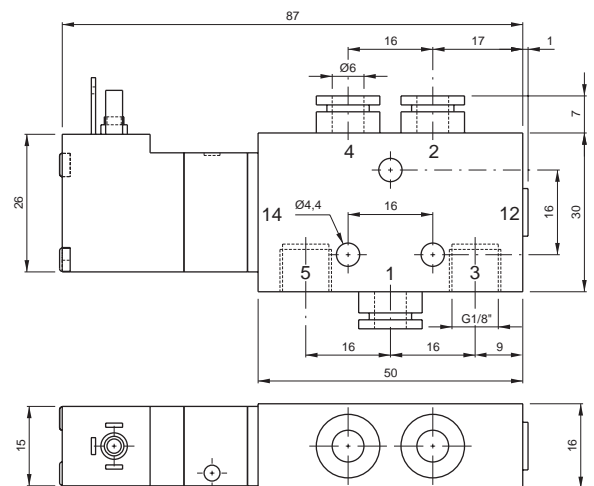


MD 510 401
MD 510 461

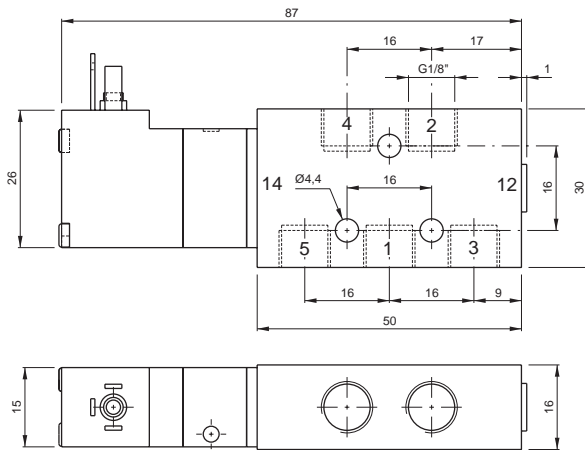

5/2-way solenoid valve with air spring, actuated by permanent signal.

Available with solenoid operators 24V = or 230 V ~.

Valves are generally equipped with manual override to push.

Type	Width [mm]	Port size 1, 2, 4	Air flow [l/min]	Operating pressure	Power consumption
MD 510 401	16	G 1/8"	450	3-10 bar	1.9 W / 3.6 VA
MD 510 461	16	6 mm p.i.f.	450	3-10 bar	1.9 W / 3.6 VA