




MD 53_ 303/MD 53_ 343




MD 531 303
MD 531 343



MD 532 303
MD 532 343



MD 533 303
MD 533 343

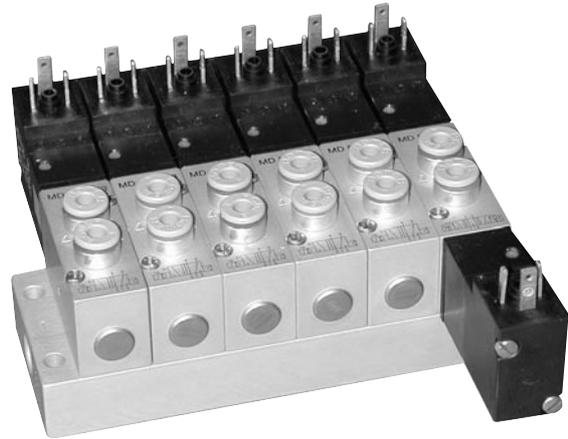

5/3-way solenoid valve with spring return to middle position, actuated by permanent signal. Ports 2 and 4 are at the valve, ports 1, 3 and 5 at the manifold plate.

Type 531 normally closed

Type 532 normally exhausted

Type 533 normally pressurized

When ordering, please complete the type number by 1, 2 or 3, according to the type in need.





Available with solenoid operators 24 V = or 230 V ~.

Valves are generally equipped with manual override to push.

Manifolds are described on page 2.6.2.1.

Blanking plates are also available, type BP 5 303.

Mounting screws and seals are included.

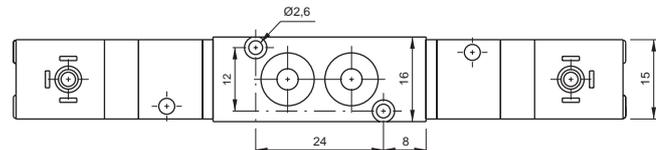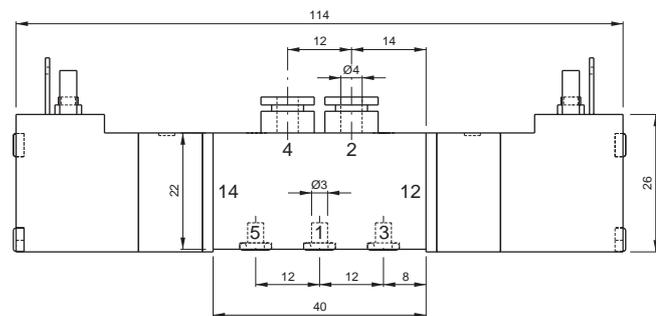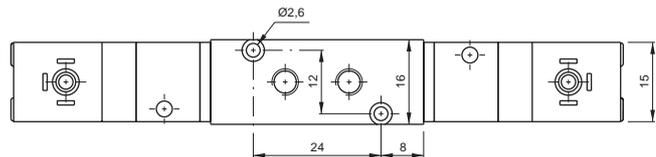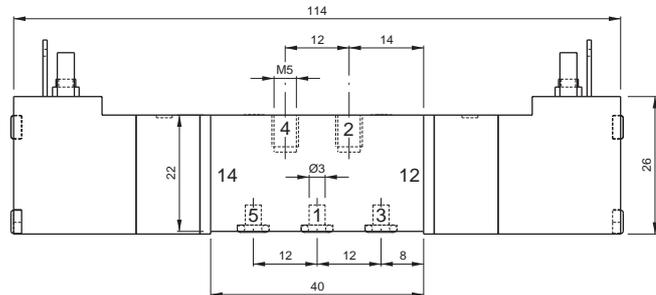

Type	Width [mm]	Port size 2, 4	Air flow [l/min]	Operating pressure	Power consumption
MD 53_ 303	16	M5	280	3-10 bar	1.9 W / 3.6 VA
MD 53_ 343	16	4 mm p.i.f.	280	3-10 bar	1.9 W / 3.6 VA

2.5.3.2.1.