




Common connection to port 1 (pressure), 3 and 5 (exhaust). The individual ports 2 and 4 are also in the manifold plate, equipped with push-in fittings.

The following valves can be assembled to the manifold plate type RD 5__ 344:

- 5/2-way MD 510 304 page 2.5.2.2.5.
- 5/2-way MD 520 304 page 2.5.2.2.11.
- 5/3-way MD 53_ 304 page 2.5.3.2.5.

The following valves can be assembled to the manifold plate type RD 5__ 464:

- 5/2-way MD 510 404 page 2.5.2.2.5.
- 5/2-way MD 520 404 page 2.5.2.2.11.
- 5/3-way MD 53_ 404 page 2.5.3.2.5.

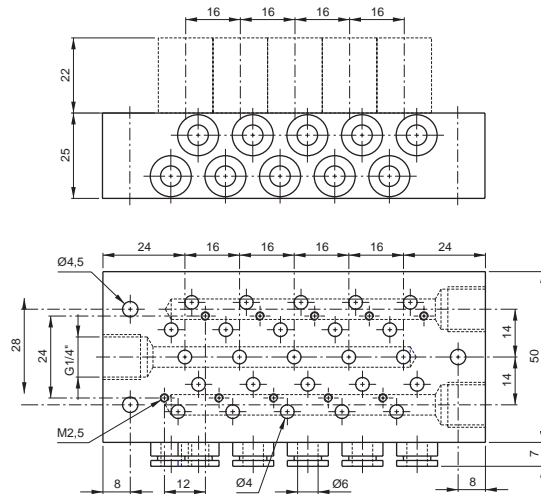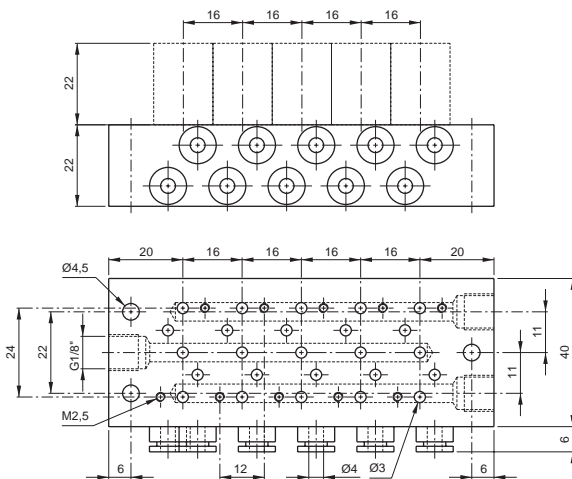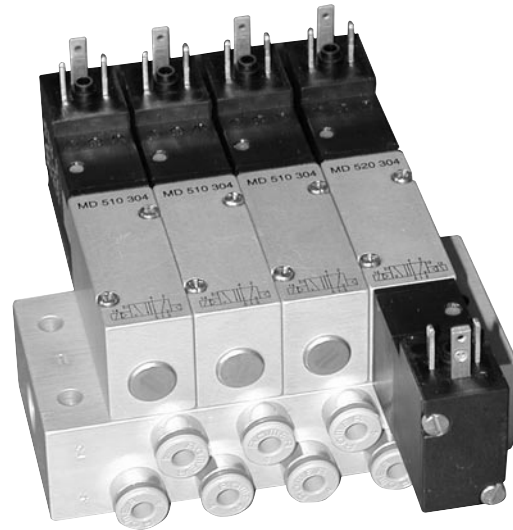

Type	Stations	Weight
RD 502 344	2	0,13 kg
RD 503 344	3	0,17 kg
RD 504 344	4	0,21 kg
RD 505 344	5	0,25 kg
RD 506 344	6	0,30 kg
RD 508 344	8	0,38 kg
RD 510 344	10	0,46 kg
RD 512 344	12	0,54 kg
RD 514 344	14	0,62 kg
RD 516 344	16	0,70 kg

Type	Stations	Weight
RD 502 464	2	0,22 kg
RD 503 464	3	0,27 kg
RD 504 464	4	0,32 kg
RD 505 464	5	0,38 kg
RD 506 464	6	0,43 kg
RD 508 464	8	0,54 kg
RD 510 464	10	0,65 kg
RD 512 464	12	0,77 kg
RD 514 464	14	0,89 kg
RD 516 464	16	1,00 kg