
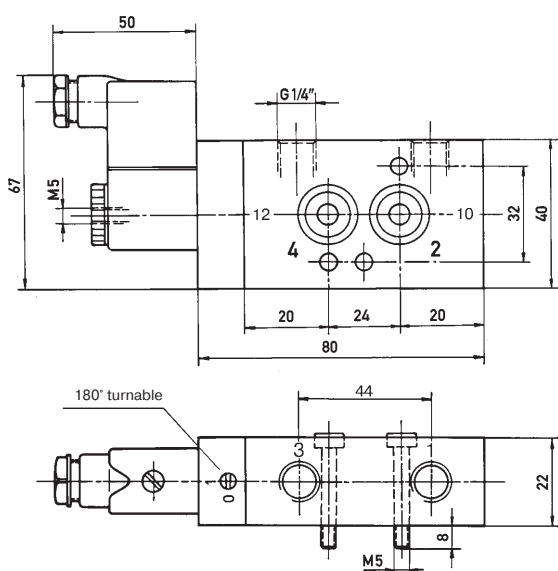


MNH 310 601/MNH 310 801



3/2-way solenoid valve, normally closed, with air spring, actuated by permanent signal. Interface according to Namur standard with exhaust air recirculation.


Available with actuators:
230V/50Hz, 110V/50Hz, 24V/50Hz, 24V=.

The valves are generally equipped with manual override. If requested without manual override, please order MN 310 ...

Valve is also available with external pilot feed; then please order MENH 310 ...

Delivery includes: 1 pin, 2 screws, 2 O-rings and connector as shown on the photo.

Explosion proof and intrinsically safe coils are available on request.

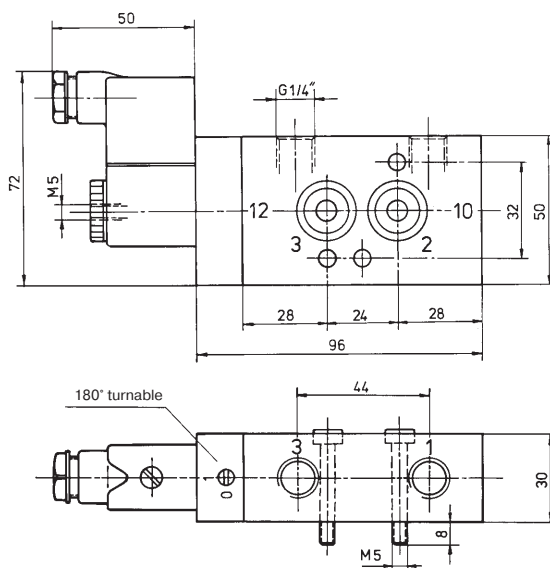

Type	Port size	Air flow	Operating press.	Power consumption	kg
MNH 310 601	G 1/4"	800 l/min	1,5 - 10 bar	3 W = /5 VA ~	0,27
MNH 310 801	G 1/4"	1500 l/min	1,5 - 10 bar	3 W = /5 VA ~	0,45