
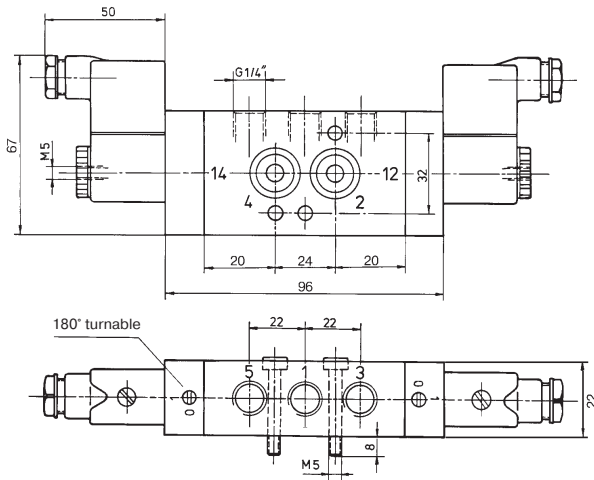


MNH 520 601/MNH 520 801



5/2-way solenoid valve actuated by impulse. Position is kept until next electrical sign even when not attached to electrical source. Interface according to Namur standard.


Available with actuators:
230V/50Hz, 110V/50Hz, 24V/50Hz, 24V=.

The valves are generally equipped with manual override. If requested without manual override, please order MN 520 ...

Valve is also available with external pilot feed; then please order MENH 520 ...

Delivery includes: 1 pin, 2 screws, 2 O-rings and connectors as shown on the photo.

Explosion proof and intrinsically safe coils are available on request.

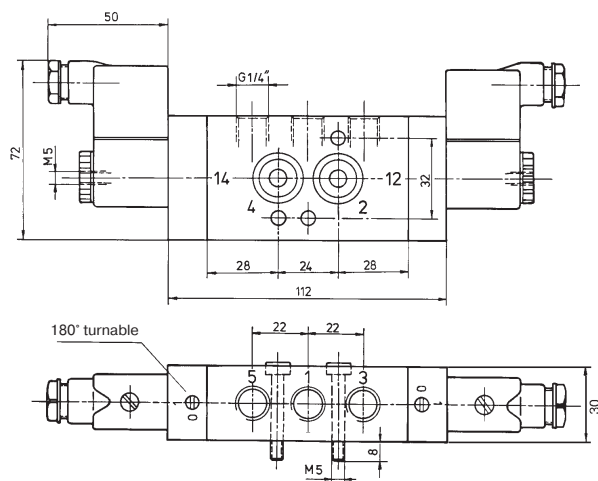

Type	Port size	Air flow	Operating press.	Power consumption	kg
MNH 520 601	G 1/4"	800 l/min	1,5 - 10 bar	3 W = /5 VA ~	0,4
MNH 520 801	G 1/4"	1500 l/min	1,5 - 10 bar	3 W = /5 VA ~	0,64