


Pneumatically actuated 5/2-way spool valve with air spring. Interface according to Namur standard.

Port sizes: 1, 3 and 5: G 1/4"

12 and 14: G 1/8"

Delivery includes: 1 pin, 2 screws and 2 O-rings.

A 30 mm wide valve with a flow of 1 500 l/min is available on request.

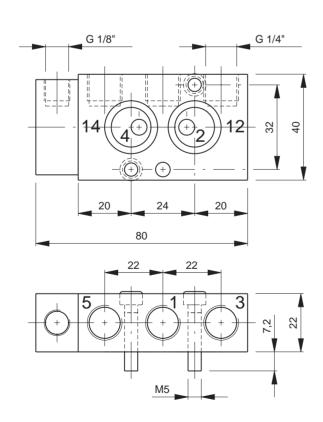

Туре	Port size	Air flow	Operating pres	s. Actuation press.	Weight
PN 510 601	G 1/4" - G 1/8"	800 I/min	2 - 10 bar	the same	0,19 kg